
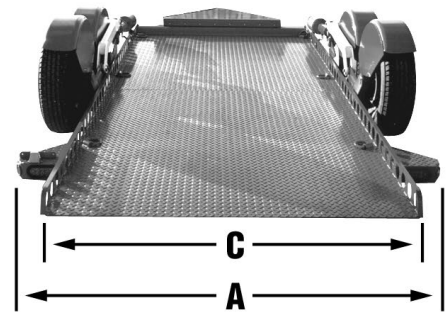


### Dimensions and Loads

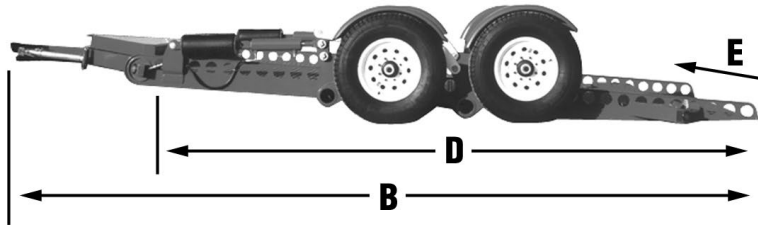

**Dimensions:**

- A = 8' 6" (102")
- B = 22' 1" (265.0")
- C = 6' 2" (74")
- D = 16' (192")
- E = 4 Degree Load Angle
- Clearance of deck at transport height = 11"

**Loads:**

- 425 lbs. Tongue Load (Trailer)
- 1,075 lbs. Tongue Load (Cargo)
- 1,500 lbs. Total Tongue Load
- 768 lbs. Wheel Load (Trailer)
- 2,232 lbs. Wheel Load (Cargo)
- 3,000 lbs. Total Wheel Load
- Two (2), 6,000 lbs. Axles

### Specifications and Features (Base Trailer)

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>Ground to Travel Height</li> <li>GVWR 13,500 lbs.</li> <li>Payload Maximum 10,000 lbs.</li> <li>Trailer Weight 3,500 lbs.</li> <li>3 to 1 Payload to Trailer Weight Ratio</li> <li>Tires ST235/80R16LRE (3,520 lbs. Capacity Each)</li> <li>Steel Wheels</li> <li>Cylinders 3-1/2" Diameter x 12" Stroke</li> <li>Adjustable Ball Hitch 2-5/16" Diameter</li> <li>Ramp Built-in</li> <li>Larger Lockable Storage Compartment</li> <li>Controlled Descent</li> <li>Tie Down Rail Built-in</li> </ul> | <ul style="list-style-type: none"> <li>DC Electric/Hydraulic Pump</li> <li>Tongue Jack</li> <li>Six (6) "D" Rings</li> <li>Breakaway Kit with Chains</li> <li>Electric Brakes Both Axles</li> <li>LED Lighting with 7 Pin Connector</li> <li>Single Pin Grounded 12 VDC Power Cable</li> <li>Control Switch with Cable</li> <li>HSLA Steel Construction (No Angle or Channel Iron)</li> <li>Grade 55 - 3/16" Diamond Plate Flooring</li> <li>Combination Hydraulic/Rubber Suspension</li> </ul> |
|--|---|

### Options

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>On Board Power – includes Battery, Charger &amp; Maintainer.....12784</li> <li>Cargo Winch 8,000 lbs. ....12785</li> <li>Pintle Hitch (2-1/2" Lunette) .....12782</li> <li>Remote Power Option .....12783<br/>(Cord in addition to On Board Power)</li> </ul> | <ul style="list-style-type: none"> <li>Spare Tire, Wheel &amp; Carrier ..... 12544</li> <li>Special Paint ..... 12789<br/>(Black, Yellow or Blue Standard)</li> </ul> |
|--|---|