

TE701 – TE801



## Sliding Axle Trailer



Optional swing-out flashers



Safety brake stop



Multiple types of tie downs



4 I-beam main frame





3/4" Approach for easy loading



# TRAIL-EZE®

323 W Quince St ♦ Mitchell SD 57301 ♦ (605) 996-5571 ♦ FAX (605) 996-5572 ♦ 1-800-232-5682  
web site: [www.trailleze.com](http://www.trailleze.com) ♦ email: [sales@traileze.com](mailto:sales@traileze.com)

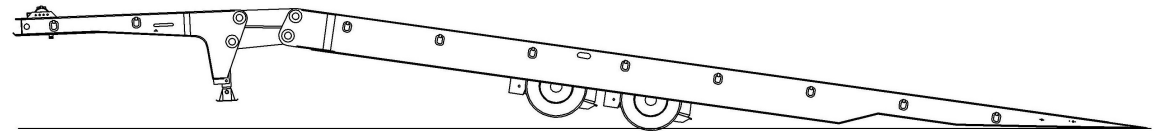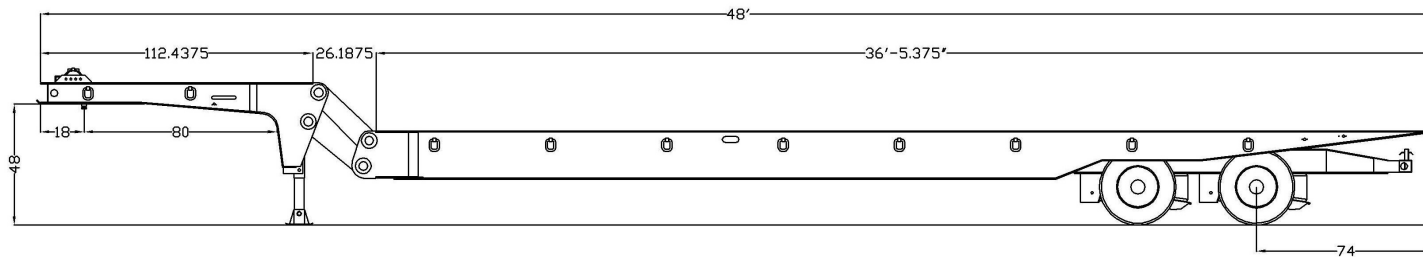

**GENERAL SPECIFICATIONS:**

- TE701** – 70,000 lbs. Distributed / 40,000 lbs. Concentrated in 10'
- TE801** - 80,000 lbs. Distributed / 50,000 lbs. Concentrated in 10'

**DIMENSIONS:**

- Overall Length:** 40' to 53'
- Main Bed Length:** 28'-5" to 41'-5"
- Upper Deck Length:** 112"
- Width:** 8'-6"
- Approach Ramp:** Steel knife edge
- Loaded Deck Height:** 37"
- Axle Slide on 44' to 47':** 13'
- Axle Slide on 48' to 53':** 15'
- Swing Clearance:** 80"
- King Pin Setting:** 18"

- LOAD ANGLE:** 6 3/4 to 8 degrees
- FRAME:** All hi-tensile steel I-beams. 4-Beam design.
- PLATFORM:** 1 1/2" Oak decking with crossmembers on 12" centers.

- STAKEPOCKETS:** on 4' centers with 4 Gotcha's across the rear.
- OPERATION:** The main bed is tilted hydraulically and the hinged slope forms a straight ramp to the upper deck which remains flat on the fifth wheel at all times.
- AXLES:** (2) 22,500 lbs.
- BRAKES:** S-Cam air brakes activated 12 1/4" x 7 1/2". ABS w/auto slack adjusters and spring brakes on all axles.
- WHEELS:** (8) 6.75 x 17.5 10-Hole steel disc.
- TIRES:** (8) 235/75R x 17.5 radials.
- PARK STANDS:** Two-speed landing gear.
- SUSPENSION:** Air ride.
- ELECTRICAL:** ICC D.O.T. standard sealed light system w/mid-ship turn signal.
- WINCH:** 12,000 lb. hydraulic with cord type remote control.
- PAINT:** Sandblasted & clean metal primed and painted 2-part polyurethane electro statically applied.
- OPTIONS:** *Many available!!*

**WARRANTY – Limited 5-Year  
Major Structural Warranty**

**Over 50 Years Building Trailers  
To Work Like You Do!!**



*Due to the constant improvements in our products, the designs and material specifications are subject to change without notice.*